



Contactors

Contactors type LC1-B

Common side view

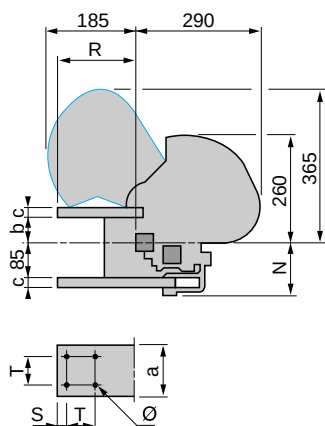


**Single-pole, 2-pole or 3-pole
contactors LC1-B●31, 32 or 33**

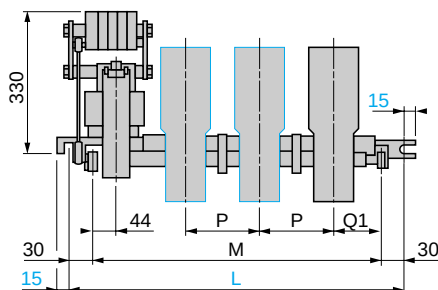


Ø 12 fixing screw

4-pole contactors LC1-B●34

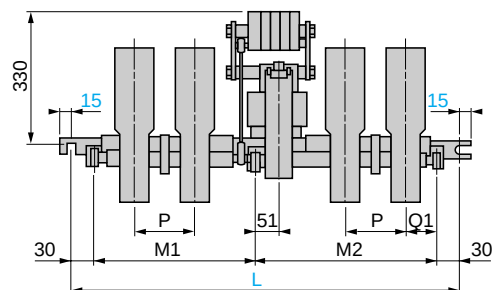[illegible]

Electrical safety clearance

Values X1 and X2 are given for a breaking capacity of 10 In ($\sim$ 3-phase supply).



		LC1-BL	LC1-BM	LC1-BP	LC1-BR
$\sim$ 3-phase voltage 380/440 V	X1	100	100	150	200
	X2	150	150	200	250
500 V	X1	100	100	150	200
	X2	150	150	220	250
660/690 V	X1	150	150	200	200
	X2	200	200	250	250
1000 V	X1	200	200	200	250
	X2	250	250	250	300

Mechanical interlock for assembling vertically mounted reversing contactors EZ2-LB0601

