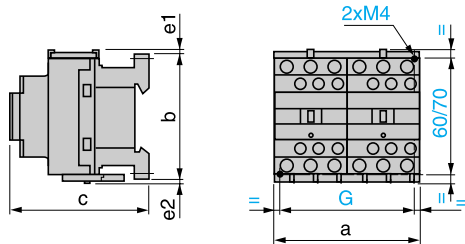
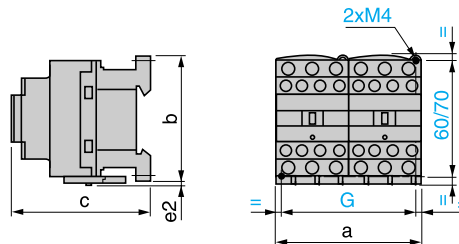


LC2-D09 - D38
2 x LC1-D09 - D38

LC2- или 2 x LC1-	a	b	c (1)	e1	e2	G
D09 - D18 ~	90	77	86	4	1,5	80
D093 - D183 ~	90	99	86	—	—	80
D09 - D18 ---	90	77	95	4	1,5	80
D093 - D183 ---	90	99	95	—	—	80
D12004	—	74	80	—	6	95
D25 - D38 ~	90	85	92	9	5	80
D253 - D383 ~	90	99	92	—	—	80
D25 - D32 ---	90	85	101	9	5	80
D253 - D383 ---	90	99	101	—	—	80
D25004	—	84	93	—	7	111


e1 или e2: включая кабельные присоединения.

(1) С защитной крышкой, без дополнительных блоков.

LC2-DT20 - DT60
2 x LC1-DT20 - DT60

LC2- или 2 x LC1-	a	b	c	G
DT20 и DT25	90	85	90	80
DT32...DT60	90	91	98	80


с, е: включая кабельные присоединения.

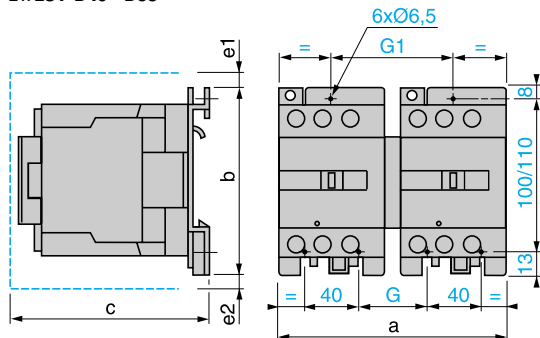LC2-D40 - D65
2 x LC1-D40 - D65

LC2- или 2 x LC1-	a	b	c	e1	e2	G	G1
D40 - D65	165	127	142	5	—	50	90
D40004	182	127	133	—	11	57	97
D65004	182	127	133	—	11	57	97
D80 и D95	182	127	158	13	—	57	96
D80004	207	127	158	—	20	71	111


с, e1 и e2: включая кабельные присоединения.

2 x LP1-D40 и D65

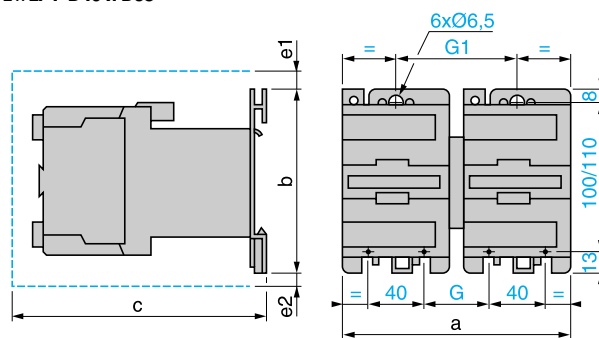

LC2- или 2 x LC1-	a	b	c	e1	e2	G	G1
D40 - D65	182	127	190	5	11	57	97
D80 и D95	207	127	215	13	20	96	111

с, e1 и e2: включая кабельные присоединения.

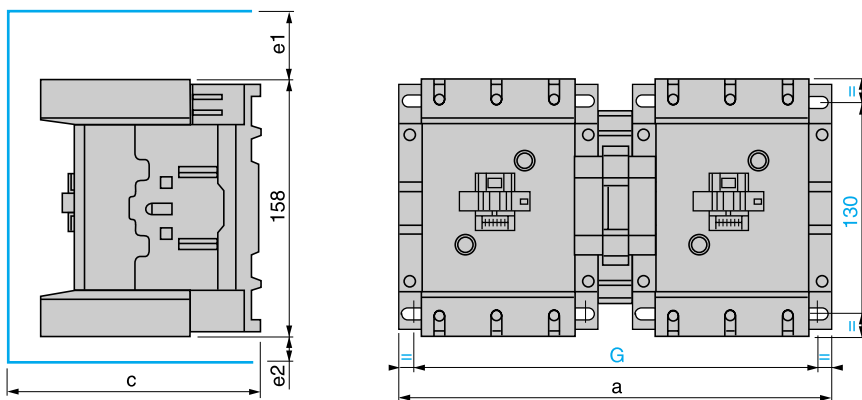LC2-D115 и D150
2 x LC1-D115 и D150

LC2- или 2 x LC1-	a	c	e1	e2	G
D115, D150	266	148	56	18	242/256
D115004	334	148	—	60	310/324

с, e1 и e2: включая кабельные присоединения.